



Profile

# Triflex Balcony Edge Finishing Profile

## Product information

### Applications


The Triflex Balcony Edge Finishing Profile can be used with the Triflex BTS-P, Triflex BFS and Triflex BWS systems.

### Properties

The Triflex Balcony Edge Finishing Profile is an aluminium coating profile for clean edge finishing and free-flow run-off by means of a projecting drip edge. This prevents water drainage at the leading edge of the balcony cantilever slab.

### Pack size

For dimensions see sketch:

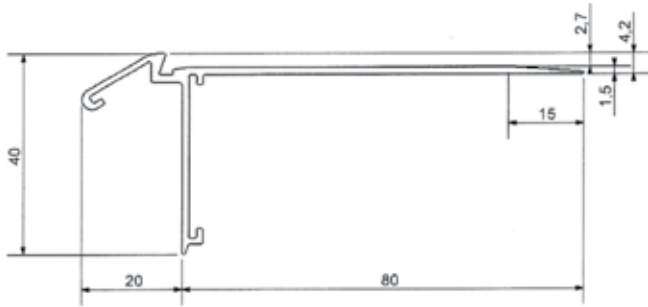

Profile length 300 cm

System accessories: connection piece, 90° inside corner, 90° outside corner

### Colours

Plain aluminium

### Conditions for use

The Triflex Balcony Edge Finishing Profile is cut to length and the underside degreased with Triflex Cleaner, roughened and then aligned and affixed to the substrate with Triflex Cryl Paste. After the paste has cured, the whole length of the surface-mounted profile side is sealed with a 20 cm wide sealing strip of Triflex ProDetail and Triflex Special Fleece. The Triflex Special Fleece must be laid up to the leading edge of the profile.

Further build-up is as described in the relevant Triflex systems. Profile joints are connected with connection pieces. A small and a large connection piece is required for each joint. A 3-4 mm-wide gap must be left at the joints rather than making a butt joint.



### General notes

We guarantee the consistently high quality of our products. Non-Triflex products must not be used with Triflex systems.

The advice we give in relation to the application of our products is based on extensive development and many years of experience, and is correct to the best of our knowledge. Given the multitude of on-site requirements, under the most varied of conditions, the user is required to test the product's suitability for its respective purpose. Technical information is subject to change without notice in the interests of technical advancement or enhancement of our products.